

## ROBOTICS

# **Product specification**

IRB 660





## **Product specification**

IRB 660-180/3.15 IRB 660-250/3.15

IRC5

Document ID: 3HAC023932-001 Revision: X

© Copyright 2004-2021 ABB. All rights reserved. Specifications subject to change without notice.

The information in this manual is subject to change without notice and should not be construed as a commitment by ABB. ABB assumes no responsibility for any errors that may appear in this manual.

Except as may be expressly stated anywhere in this manual, nothing herein shall be construed as any kind of guarantee or warranty by ABB for losses, damage to persons or property, fitness for a specific purpose or the like.

In no event shall ABB be liable for incidental or consequential damages arising from use of this manual and products described herein.

This manual and parts thereof must not be reproduced or copied without ABB's written permission.

Keep for future reference.

Additional copies of this manual may be obtained from ABB.

Original instructions.

© Copyright 2004-2021 ABB. All rights reserved. Specifications subject to change without notice.

# Table of contents

	Overview of this specification				
	Over	view	10		
1	Desc	ription	13		
	1.1	Structure	13		
		1.1.1 Introduction	13		
		1.1.2 Different robot versions	15		
		1.1.3 Definition of version designation	16		
	1.2	Standards	19		
		1.2.1 Applicable standards	19		
	1.3	Installation	21		
		1.3.1 Introduction	21		
		1.3.2 Operating requirements	22		
		1.3.3 Mounting the manipulator	23		
	1.4	Calibration	28		
		1.4.1 Calibration methods	28		
		1.4.2 Fine calibration	30		
	1.5	Load diagrams	32		
	1.5	1.5.1 Introduction to Load diagrams	32		
		1.5.2 Load diagrams	33		
		1.5.3 Maximum load and moment of inertia	35		
		1.5.4 Maximum TCP acceleration	36		
	1.6	Mounting of equipment	37		
	1.0	1.6.1 Overview	37		
	1.7	Robot motion	42		
	1.7		42		
		1.7.1 Introduction	42		
		1.7.2 Performance according to ISO 9283			
		1.7.3 Velocity	45		
		1.7.4 Robot stopping distances and times	46		
	1.8	Customer connections	47		
		1.8.1 Introduction	47		
	1.9	Maintenance and troubleshooting	49		
		1.9.1 Introduction	49		
2	Spec	ification of variants and options	51		
	2.1	Introduction to variants and options	51		
	2.1	Manipulator	52		
	2.2	Floor cables	52		
	2.3 2.4	Process	- 55 - 56		
	2.4 2.5	User documentation	50 57		
	2.5		57		
3	Acce	essories	59		
	3.1	Introduction to accessories	59		
Inc	dex		61		

This page is intentionally left blank

## **Overview of this specification**

#### About this product specification

This product specification describes the performance of the manipulator or a complete family of manipulators in terms of:

- · The structure and dimensional prints
- · The fulfilment of standards, safety, and operating equipment
- The load diagrams, mounting or extra equipment, the motion, and the robot reach
- · The specification of available variants and options

The specification covers the manipulator using the IRC5 controller.

#### Usage

Product specifications are used to find data and performance about the product, for example to decide which product to buy. How to handle the product is described in the product manual.

The specification is intended for:

- Product managers and product personnel
- Sales and marketing personnel
- Order and customer service personnel

#### References

Reference	Document ID
Product manual - IRB 660	3HAC025755-001
Product specification - Controller IRC5 IRC5 with main computer DSQC1000.	3HAC047400-001
<i>Product specification - Controller software IRC5</i> IRC5 with main computer DSQC1000 and RobotWare 5.6x.	3HAC050945-001
<i>Product specification - Controller software IRC5</i> IRC5 with main computer DSQC1000 and RobotWare 6.	3HAC050945-001
Product specification - Robot user documentation, IRC5 with RobotWare 6	3HAC052355-001
Product specification - Robot stopping distances according to ISO 10218- 1	3HAC048645-001

#### Revisions

Revision	Description
-	- New Product specification
A	- General corrections
В	- Changes in Figure 3 and Figure 16.
С	<ul> <li>Update Customer connections- Interbus removed</li> <li>Footnote added to "Pose accuracy"</li> <li>Stock Warranty</li> </ul>

Continues on next page

## Continued

Revision	Description	
D	- Changes in chapter Standards - Directions of forces - Warranty information for Load diagrams	
E	- Position switches removed.	
F	<ul> <li>Work range</li> <li>Explanation of ISO values (new figure and table)</li> <li>Stopping distance</li> <li>User documentation on DVD</li> </ul>	
G	- General update for 9.1 release	
н	- Text for Standards updated	
J	- Tightening torque adjusted	
к	<ul> <li>Table for ambient temperature adjusted</li> <li>New picture of tool flange</li> <li>Minor corrections of foundation forces</li> </ul>	
L	Machinery directive updated     Minor corrections	
М	Base plate drawing updated	
Ν	Minor corrections/update	
Р	Text for ISO test adjusted	
Q	Minor corrections/update	
R	<ul> <li>Published in release R17.1. The following updates are done in this revision:</li> <li>Axis Calibration method added</li> <li>Restriction of load diagram added.</li> </ul>	
S	<ul> <li>Published in release R17.2. The following updates are done in this revision:</li> <li>Updated list of applicable standards.</li> <li>TCP acceleration information added</li> </ul>	
т	<ul><li>Published in release R18.2. The following updates are done in this revision:</li><li>Added locating hole position in tool flange view.</li></ul>	
U	<ul> <li>Published in release R20D. The following updates are done in this revision: <ul> <li>Minor changes.</li> <li>New customer option cable harness (with ethernet cable) added.</li> <li>Warranty section updated.</li> </ul> </li> </ul>	
V	<ul> <li>Published in release 21B. The following updates are done in this revision: <ul> <li>Text regarding fastener quality is updated.</li> <li>Specification updated in customer connection section for DressPack, Parallel and Ethernet communication.</li> <li>Removed Axis resolution.</li> <li>Updated information about the option <i>Extended working range</i>.</li> </ul></li></ul>	

Continues on next page

Continued

Revision	Description
x	<ul> <li>Published in release 21D. The following updates are done in this revision: <ul> <li>Minor changes.</li> <li>The data for robot stopping distances is removed. See <i>Product specification - Robot stopping distances according to ISO 10218-1</i>.</li> <li>Description for option 455-8 updated.</li> </ul> </li> </ul>

## Overview

#### About this Product specification

It describes the performance of the manipulator or a complete family of manipulators in terms of:

- The structure and dimensional prints
- · The fulfilment of standards, safety and operating requirements
- The load diagrams, mounting of extra equipment, the motion and the robot reach
- · The specification of variant and options available

#### Usage

Product specifications are used to find data and performance about the product, for example to decide which product to buy. How to handle the product is described in the product manual.

#### Who should read this manual?

This manual is intended for:

- Product managers and Product personnel
- Sales and Marketing personnel
- Order and Customer Service personnel

#### Contents

Please see Table of Contents on page 3.

#### References

Reference	Document ID
Product specification - Controller IRC5 with FlexPendant	3HAC041344-001
Product specification - Controller software IRC5	3HAC022349-001
Product specification - Robot user documentation, IRC5 with Robot- Ware 5	3HAC024534-001
Product manual - IRB 660	3HAC025755-001

#### Revisions

Revision	Description	
-	- New Product specification	
Α	- General corrections	
В	- Changes in Figure 3 and Figure 16.	
С	<ul> <li>Update Customer connections- Interbus removed</li> <li>Footnote added to "Pose accuracy"</li> <li>Stock Warranty</li> </ul>	

## Continued

Revision	Description	
D	<ul> <li>Changes in chapter Standards</li> <li>Directions of forces</li> <li>Warranty information for Load diagrams</li> </ul>	
E	- Position switches removed.	
F	<ul> <li>Work range</li> <li>Explanation of ISO values (new figure and table)</li> <li>Stopping distance</li> <li>User documentation on DVD</li> </ul>	
G	- General update for 9.1 release	
н	- Text for Standards updated	
J	- Tightening torque adjusted	
К	<ul> <li>Table for ambient temperature adjusted</li> <li>New picture of tool flange</li> <li>Minor corrections of foundation forces</li> </ul>	
L	Machinery directive updated     Minor corrections	
М	Base plate drawing updated	
N	Minor corrections/update	
Р	Text for ISO test adjusted	

This page is intentionally left blank

## 1.1 Structure


## 1.1.1 Introduction

Robot family	
,	IRB 660 is ABB Robotics latest generation of 4-axis palletizing robot, designed with a focus on its high production capacity, short cycle time at a high payload, long reach together with the very high uptime, which is significant for ABB's robots. It is available in two versions; a handling capacity of 180 kg and 250 kg, both with a reach of 3.15 m.
	Customer connections such as power signals, Bus signals and twin air are integrated in the robot, from the robot base to connections at the robot tool flange.
Operating system	
	The robot is equipped with the IRC5 controller and robot control software, RobotWare. RobotWare supports every aspect of the robot system, such as motion control, development and execution of application programs, communication and so on. For more information, see <i>Product specification - Controller IRC5 with</i> <i>FlexPendant</i> .
Safety	
	Safety standards valid for complete robot, manipulator and controller.
Additional function	ality
	For additional functionality, the robot can be equipped with optional software for application support. For example, gluing and welding, communication feature such

application support. For example, gluing and welding, communication feature such as network communication, and advanced functions such as multitasking, sensor control and so on. For a complete description on optional software, see *Product specification - Controller software IRC5*.

13

1.1.1 Introduction *Continued* 

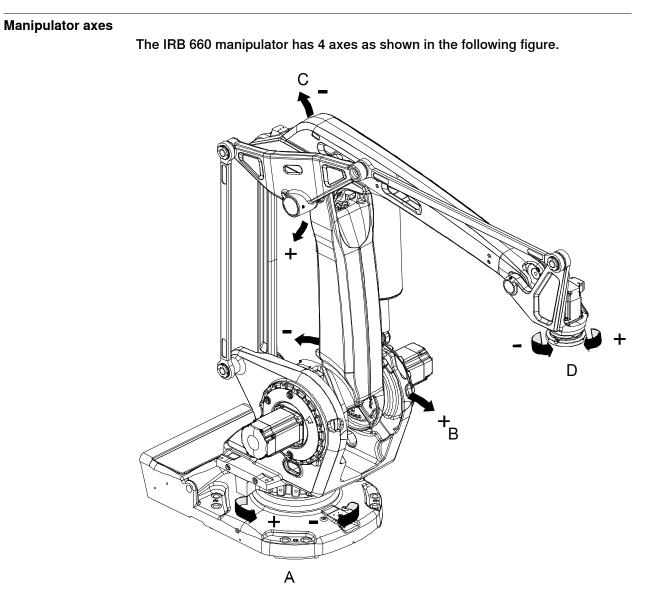

en100000670

Pos.	Description
A	Axis 1
В	Axis 2
С	Axis 3
D	Axis 6

1.1.2 Different robot versions

## 1.1.2 Different robot versions

#### General

The IRB 660 is available in two versions.

Robot type	Handling capacity (kg)	Reach (m)
IRB 660	180	3.15
IRB 660	250	3.15

1.1.3 Definition of version designation

## 1.1.3 Definition of version designation

## **IRB 660 Mounting**

Handling capacity/ Reach

	Prefix	Description
Mounting	-	Floor-mounted manipulator
Handling capacity	ууу	Indicates the maximum handling capacity (kg)
Reach	x.x	Indicates the maximum reach at wrist center (m)

#### Manipulator weight

Robot type	Handling capacity (kg)	Reach (m)	Weight (kg)
IRB 660	180	3.15	1750
IRB 660	250	3.15	1750

#### Other technical data

Data	Description	Note
Airborne noise level		< 70 dB (A) Leq (acc. to Ma- chiney directive 2006/42/EG).

# 1.1.3 Definition of version designation *Continued*

### Power consumption at max load


Path E1-E2-E3-E4 in the ISO Cube.

ISO Cube Speed [mm/s]	n/s] Power consumption [kW]	
	IRB 660-180/3.15	IRB 660-250/3.15
Max.	3.17	2.36
1000	1.31	1.50
500	0.89	1.02
100	0.61	0.70

General Palletizing movements in 48s. at maximum speed.

General Palletizing move-	Power consumption [kW]	
ments	IRB 660-180/3.15	IRB 660-250/3.15
Max. speed	3.08	2.34

The path E1-E2-E3-E4 in the ISO Cube is shown in the following figure.



xx1000000101


Pos	Description
A	1000mm

17

# 1.1.3 Definition of version designation *Continued*

### **Dimensions IRB660**

The following figure shows the front, side, and top view of the IRB660 manipulator (dimensions in mm). Allow 200 mm behind the manipulator foot for cables.

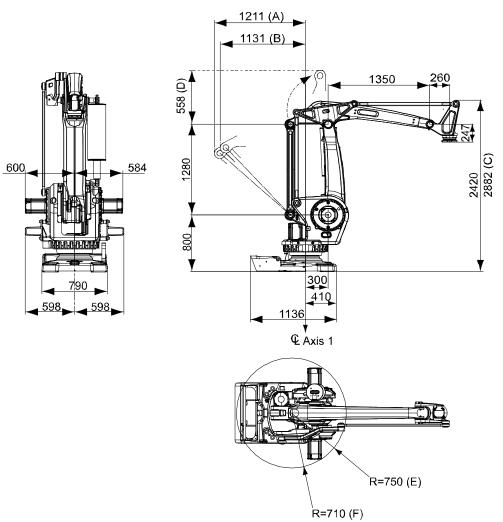

#### en1000000821

Position	Description
А	At mechanical stop
в	At max. working range axis 2
С	At max. working range axis 3
D	At min. working range axis 3
E	Radius for fork lift pocket
F	Radius for axis 3 motor

## 1.2 Standards

## 1.2.1 Applicable standards



The listed standards are valid at the time of the release of this document. Phased out or replaced standards are removed from the list when needed.

#### General

The product is designed in accordance with ISO 10218-1:2011, Robots for industrial environments - Safety requirements -Part 1 Robots, and applicable parts in the normative references, as referred to from ISO 10218-1:2011. In case of deviations from ISO 10218-1:2011, these are listed in the declaration of incorporation which is part of the product delivery.

#### Normative standards as referred to from ISO 10218-1

Standard	Description
ISO 9283:1998	Manipulating industrial robots - Performance criteria and related test methods
ISO 10218-2	Robots and robotic devices - Safety requirements for industrial robots - Part 2: Robot systems and integration
ISO 12100	Safety of machinery - General principles for design - Risk as- sessment and risk reduction
ISO 13849-1:2006	Safety of machinery - Safety related parts of control systems - Part 1: General principles for design
ISO 13850	Safety of machinery - Emergency stop - Principles for design
IEC 60204-1	Safety of machinery - Electrical equipment of machines - Part 1: General requirements

#### **Region specific standards and regulations**

Standard	Description	
ANSI/RIA R15.06	Safety requirements for industrial robots and robot systems	
ANSI/UL 1740	Safety standard for robots and robotic equipment	
CAN/CSA Z 434-03	Industrial robots and robot Systems - General safety require- ments	

#### Other standards used in design

Standard	Description
ISO 9787:2013	Robots and robotic devices Coordinate systems and motion nomenclatures
IEC 61000-6-2	Electromagnetic compatibility (EMC) – Part 6-2: Generic standards – Immunity standard for industrial environments
IEC 61000-6-4	Electromagnetic compatibility (EMC) – Part 6-4: Generic standards – Emission standard for industrial environments

Product specification - IRB 660 3HAC023932-001 Revision: X Continues on next page

1.2.1 Applicable standards *Continued* 

Standard	Description	
ISO 13732-1:2006	Ergonomics of the thermal environment - Part 1	
IEC 60974-1:2012 <sup>i</sup>	Arc welding equipment - Part 1: Welding power sources	
IEC 60974-10:2014 <sup><i>i</i></sup>	Arc welding equipment - Part 10: EMC requirements	
ISO 14644-1:2015 <sup>ii</sup>	Classification of air cleanliness	
IEC 60529:1989 + A2:2013	Degrees of protection provided by enclosures (IP code)	

i Only valid for arc welding robots. Replaces IEC 61000-6-4 for arc welding robots.

ii Only robots with protection Clean Room.

1.3.1 Introduction

## 1.3 Installation

## 1.3.1 Introduction

IRB 660 is designed for floor mounting (no tilting allowed around X or Y axis).
Depending on the robot version, an end effector with maximum weight of 180 to
250 kg including payload, can be mounted on the mounting flange (axis 6). For more information on Load diagrams, see <i>Load diagrams on page 33</i> .
The working range of axis 1 can be limited by mechanical stops. Electronic Position
Switches can be used on all axes, for position indication of the manipulator.

## **External Mains Transformer**

Include an external transformer for mains voltage 200V and 220V.

1.3.2 Operating requirements

## 1.3.2 Operating requirements

#### **Protection standards**

Manipulator IP67.

#### **Explosive environments**

The robot must not be located or operated in an explosive environment.

#### **Ambient temperature**

Description	Standard/Option	Temperature
Manipulator during operation	Standard	0°C <sup>i</sup> (32°F) to +45°C (113°F)
For the controller	Standard/Option	See Product specification - Controller IRC5 with FlexPendant
Complete robot during transportation and storage	Standard	-25°C (-13°F) to +55°C (131°F)
For short periods (not exceed- ing 24 hours).	Standard	up to +70°C (158°F)

At low environmental temperature < 10° C is, as with any other machine, a warm-up phase recommended to be run with the robot. Below 5° C this warm-up phase is mandatory. Otherwise there is a risk that the robot stops or run with lower performance due to temperature dependent oil and grease viscosity.

#### **Relative humidity**

Description	Relative humidiy
Complete robot during operation, transportation and storage	Maximum 95% at constant temperat- ure

1.3.3 Mounting the manipulator

## 1.3.3 Mounting the manipulator


#### **Maximum Load**

Maximum load in relation to the base coordinate system.

#### **Floor Mounted**

Force	Endurance load (in operation)	Max. load (emergency stop)
Force xy	± 8.0 kN	± 11.7 kN
Force z	18.0 ±4.9 kN	18.0 ±8.2 kN
Torque xy	± 23.2 kNm	± 31.2 kNm
Torque z	± 7.7 kNm	± 9.9 kNm

The following figure shows the direction of forces.

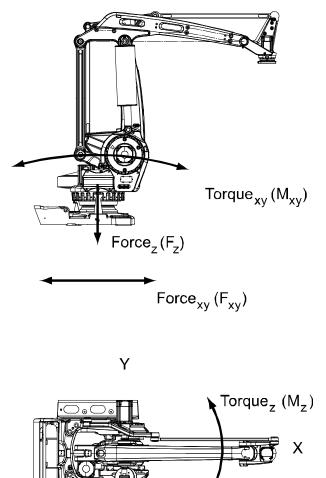

en1000000825

## Note regarding $M_{xy}$ and $F_{xy}$

The bending torque  $(M_{xy})$  can occur in any direction in the XY-plane of the base coordinate system.


The same applies to the transverse force ( $F_{xy}$ ).

Continues on next page

# 1.3.3 Mounting the manipulator *Continued*

## Fastening holes robot base

The following figure shows the hole configuration (dimensions in mm).

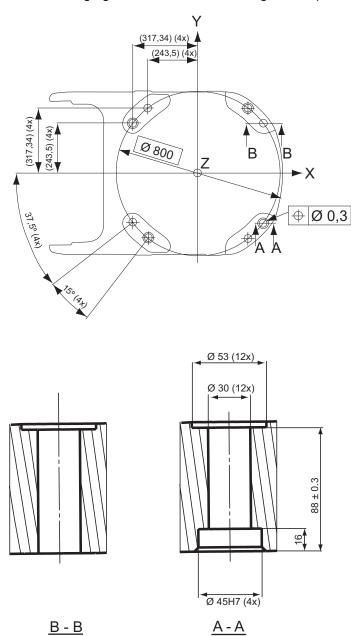

xx100000826

Recommended screws for fastening the manipulator to a base plate:


• M24 x 140 8.8 with 4 mm flat washer. Torque value 725 Nm.

## **Note**

Only two guiding sleeves shall be used. The corresponding holes in the base plate shall be circular and oval according to the following base plate drawing. Regarding AbsAcc performance, the recommended are the chosen guide holes those are according to the following base plate drawing.

#### Continues on next page

1.3.3 Mounting the manipulator Continued

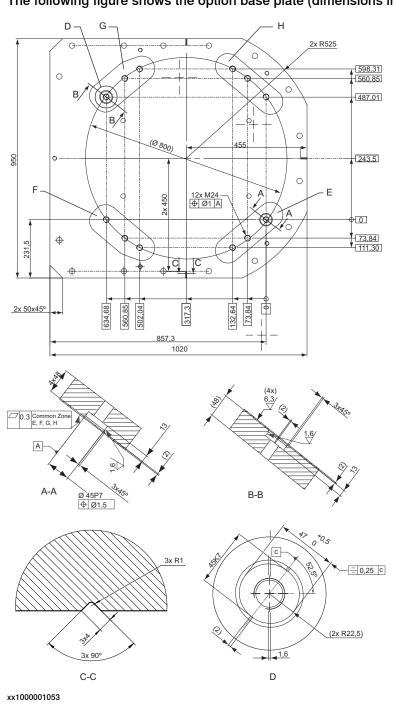


The following figure shows the option base plate (dimensions in mm).

E, F, G, H Common tolerance zone (accuracy all over the base plate from one contact surface to the other)

Base plate drawing


1.3.3 Mounting the manipulator *Continued* 

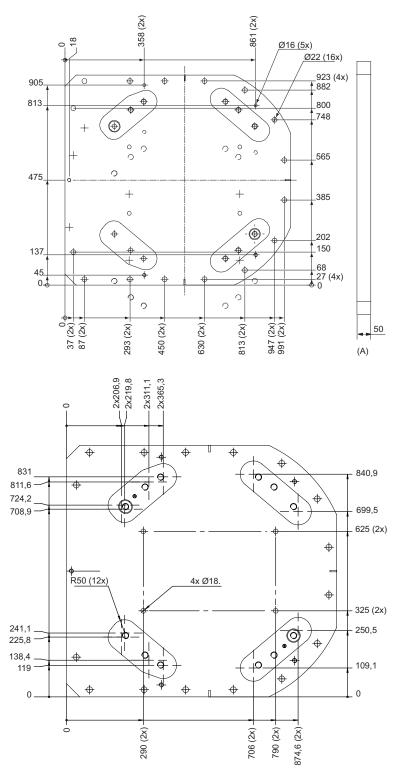

xx1000001054

Pos	Description	
Α	Color: RAL 9005	
	Thickness: 80-100 μm	

1.3.3 Mounting the manipulator Continued



xx1000001055

Pos	Description
А	Guide sleeve protected from corrosion

1.4.1 Calibration methods

## 1.4 Calibration

## 1.4.1 Calibration methods

#### Overview

This section specifies the different types of calibration and the calibration methods that are supplied by ABB.

More information is available in the product manual.

#### Types of calibration

Type of calibration	Description	Calibration method
Standard calibration	The calibrated robot is positioned at calibration position.	Axis Calibration or Cal- ibration Pendulum <sup>i</sup>
	Standard calibration data is found on the SMB (serial measurement board) or EIB in the robot.	
	For robots with RobotWare 5.04 or older, the calibration data is delivered in a file, calib.cfg, supplied with the robot at delivery. The file identifies the correct resolver/motor position corresponding to the robot home position.	

The robot is calibrated by either Calibration Pendulum or Axis Calibration at factory. Always use the same calibration method as used at the factory. Information about valid calibration method is found on the calibration label or in the calibration menu on the FlexPendant.

If no data is found related to standard calibration, contact the local ABB Service.

#### Brief description of calibration methods

#### **Calibration Pendulum method**

Calibration Pendulum is a standard calibration method for calibration of many of ABB robots (except IRB 6400R, IRB 640, IRB 1400H, and IRB 4400S).

Two different routines are available for the Calibration Pendulum method:

- Calibration Pendulum II
- Reference calibration

The calibration equipment for Calibration Pendulum is delivered as a complete toolkit, including the *Operating manual - Calibration Pendulum*, which describes the method and the different routines further.

#### Axis Calibration method

Axis Calibration is a standard calibration method for calibration of IRB 660. It is the recommended method in order to achieve proper performance.

The following routines are available for the Axis Calibration method:

- Fine calibration
- Update revolution counters
- Reference calibration

The calibration equipment for Axis Calibration is delivered as a toolkit.

1.4.1 Calibration methods *Continued* 

The actual instructions of how to perform the calibration procedure and what to do at each step is given on the FlexPendant. You will be guided through the calibration procedure, step by step.


1.4.2 Fine calibration

## 1.4.2 Fine calibration

#### Overview

Fine calibration is made using the Calibration Pendulum, see *Operating manual - Calibration Pendulum* or Axis calibration, see *Product manual - IRB 4600* and *Product manual - IRB 4600 Foundry Prime*.

The following figure shows all axes in zero position.

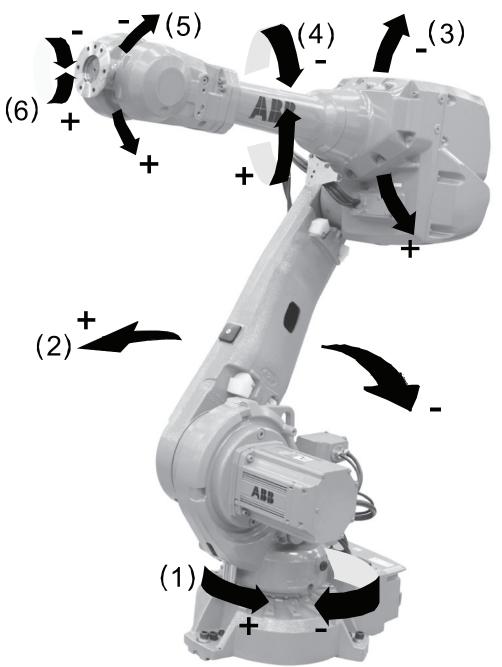

xx1800001381

Continues on next page

1.4.2 Fine calibration Continued

Calibration	Position
Calibration of all axes	All axes are in zero position
Calibration of axis 1 and 2	Axis 1 and 2 in zero position Axis 3 to 6 in any position
Calibration of axis 1	Axis 1 in zero position Axis 2 to 6 in any position

1.5.1 Introduction to Load diagrams

## 1.5 Load diagrams

## 1.5.1 Introduction to Load diagrams

#### Information



It is very important to always define correct actual load data and correct payload of the robot. Incorrect definitions of load data can result in overloading of the robot.

If incorrect load data is used, and/or if loads outside the load diagram are used, the following parts can be damaged due to overload:

- motors
- gearboxes
- mechanical structure



In RobotWare, the service routine LoadIdentify can be used to determine correct load parameters. The routine automatically defines the tool and the load. See *Operating manual - IRC5 with FlexPendant*, for detailed information.



Robots running with incorrect load data and/or with loads outside the load diagram, will not be covered by robot warranty.

#### General

The load diagrams include a nominal payload inertia,  $J_0$  of 15 kgm<sup>2</sup>, and an extra load of 50 kg at the upper arm housing.

At different moment of inertia the load diagram will be changed. For robots that are allowed tilted, wall or inverted mounted, the load diagrams as given are valid and thus it is also possible to use RobotLoad within those tilt and axis limits.

#### Control of load case with RobotLoad

To verify a specific load case, use the RobotStudio add-in RobotLoad.


The result from RobotLoad is only valid within the maximum loads and tilt angles. There is no warning if the maximum permitted arm load is exceeded. For over-load cases and special applications, contact ABB for further analysis.

1.5.2 Load diagrams

## 1.5.2 Load diagrams

#### IRB 660-180/3.15

The following figures shows the maximum permitted load mounted on the robot tool flange at different positions (center of gravity).

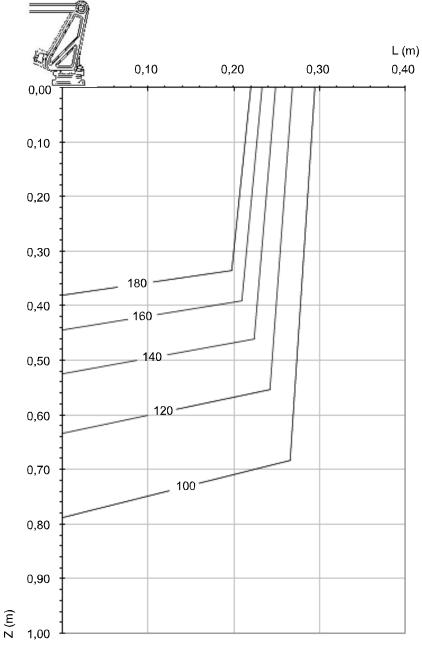


xx100000832

1.5.2 Load diagrams *Continued* 

### IRB 660-250/3.15

The following figures shows the maximum permitted load mounted on the robot tool flange at different positions (center of gravity).

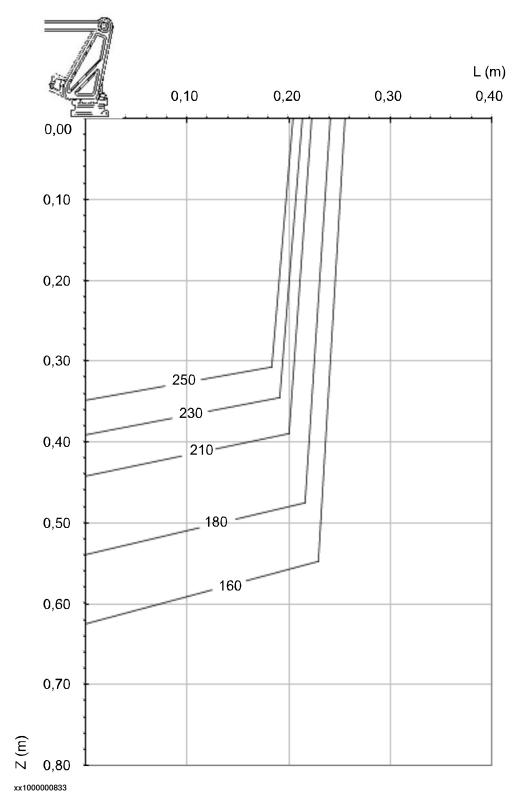


1.5.3 Maximum load and moment of inertia

## 1.5.3 Maximum load and moment of inertia

#### Overview

Load in kg, Z and L in m and J in  $kgm^2$ .

Axis		Maximum moment of inertia
6		Ja6 = Load x L <sup>2</sup> + J <sub>0Z</sub> $\leq$ 250 kgm <sup>2</sup>
	1	



xx100000834

Pos		Description
A		Center of gravity
	Description	
J <sub>ox</sub> , J <sub>oy</sub> , J <sub>oz</sub>	Max. moment of inertia around the X, Y and Z axes at center of gravity.	

1.5.4 Maximum TCP acceleration

## 1.5.4 Maximum TCP acceleration

#### General

Higher values can be reached with lower loads than the nominal because of our dynamical motion control QuickMove2. For specific values in the unique customer cycle, or for robots not listed in the table below, we recommend then to use RobotStudio.

#### Maximum Cartesian design acceleration for nominal loads

Robot type	E-stop Max acceleration at nominal load COG [m/s <sup>2</sup> ]	Controlled Motion Max acceleration at nominal load COG [m/s <sup>2</sup> ]
IRB 660 - 250/3.15	31	18
IRB 660 - 180/3.15	37	24



Acceleration levels for emergency stop and controlled motion includes acceleration due to gravitational forces. Nominal load is defined with nominal mass and cog with max offset in Z and L (see the load diagram).

1.6.1 Overview


## 1.6 Mounting of equipment

### 1.6.1 Overview

#### General

Extra loads can be mounted on to the upper arm and on to the left side of the frame. Holes and definitions of masses are shown in following figures.

For mounting of an external vacuum hose there are six holes on the upper arm (see the following figure). The maximum weight for the vacuum hose and fastening device is 35kg. When using the holes, the weight of the vacuum hose shall be reduced from the maximum handling capacity, for each variant respectively.

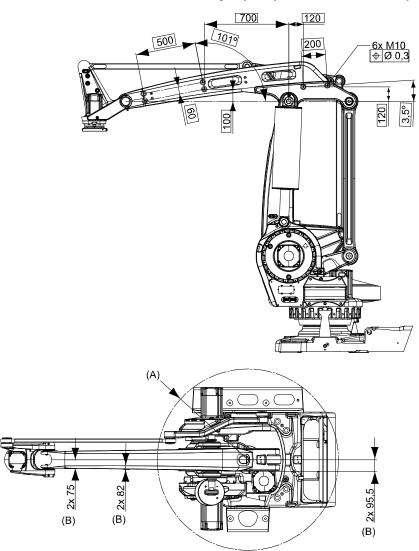

#### xx100000835


Position	Description
A	R750 Right fork lift pocket
В	M10 Mounting hole, upper arm


1.6.1 Overview *Continued* 

#### Frame

For mounting of extra load on to the frame there are three holes on the left side (see the following figure). The maximum weight of the extra load is 150kg and the maximum moment of inertia is 120kgm<sup>2</sup>.


Description	Value and definition
Permitted extra load on frame	M = 150 kg
Max. moment of inertia for extra load	J <sub>H</sub> = 120 kgm <sup>2</sup>
Recommended position as shown in the following figure	$\begin{split} J_{H} &= J_{H0} + M \ x \ R^{2} \\ J_{H0} \ \text{is the moment of inertia } (kgm^{2}) \ \text{for the extra load.} \\ R \ \text{is the radius } (m) \ \text{from the center of axis1.} \\ M \ \text{is the total mass } (kg) \ \text{of the extra load.} \end{split}$

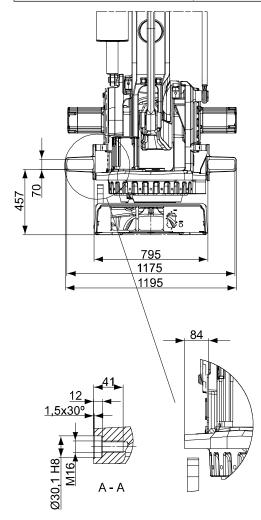

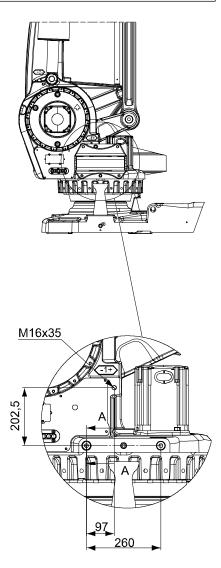

xx100000836


1.6.1 Overview Continued

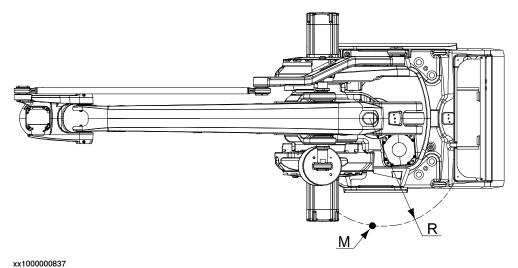


The following figure shows the radius for extra load on frame.

Product specification - IRB 660 3HAC023932-001 Revision: X

1.6.1 Overview *Continued* 

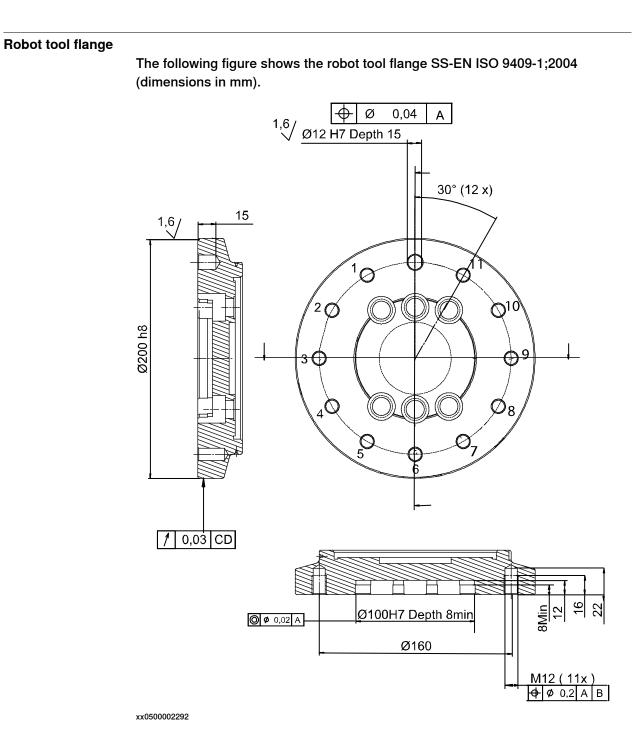

1.6.1 Overview Continued

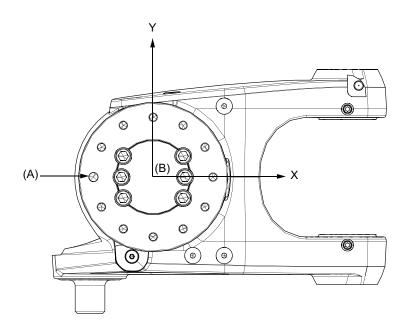

xx1800001377

-	Tool flange in bottom view
Α	Locating hole
В	Tool coordinate system

#### **Fastener quality**

When fitting tools on the tool flange, only use screws with quality 12.9. For other equipment use suitable screws and tightening torque for your application.

1.7.1 Introduction

## 1.7 Robot motion

## 1.7.1 Introduction

#### **Type of Motion**

Axis	Type of motion	Range of movement	Option
1	Rotation motion	+180° to -180°	+220° to -220°
2	Arm motion	+85° to -42°	
3	Arm motion	+120° to -20°	
6	Turn motion	+300° to -300° (default) +150 revolutions to -150 revolutions Max (see the following note)	




- The default working range for axis 6 can be extended by changing parameter values in the software.
- Option 610-1 *Independent axis* can be used for resetting the revolution counter after the axis has been rotated (no need for "rewinding" the axis).

1.7.1 Introduction Continued

#### Illustration

The following figure shows the extreme positions of the robot arm specified at the tool flange center (dimensions in mm).

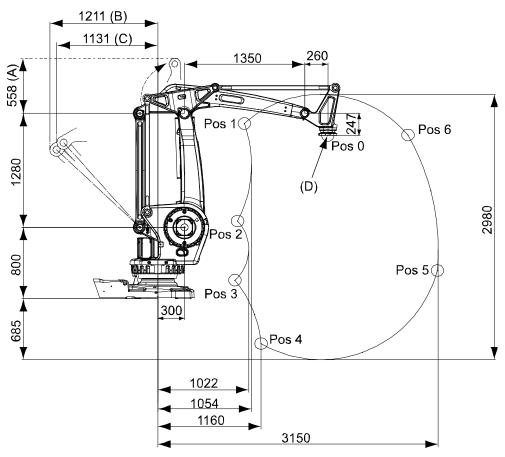

xx100000839

Position	Description
A	Min. working stop
В	Mechanical stop
С	Max. working stop
D	Tool flange center

#### Positions at wrist center

Position number (see pre- ceding figure)	X Position (mm)	Z Position (mm)	Axis2 Angle (degrees)	Axis3 Angle (degrees)
0	1910	1833	0	0
1	972	1966	-42	-20
2	895	870	-42	28
3	866	207	50	120
4	1160	-505	85	120
5	3139	315	85	15
6	2809	1837	50	-20


1.7.2 Performance according to ISO 9283

## 1.7.2 Performance according to ISO 9283

#### General

At rated maximum load, maximum offset and 1.6 m/s velocity on the inclined ISO test plane, with all six axes in motion. Values in the table below are the average result of measurements on a small number of robots. The result may differ depending on where in the working range the robot is positioning, velocity, arm configuration, from which direction the position is approached, the load direction of the arm system. Backlashes in gearboxes also affect the result.

The figures for AP, RP, AT and RT are measured according to figure below.

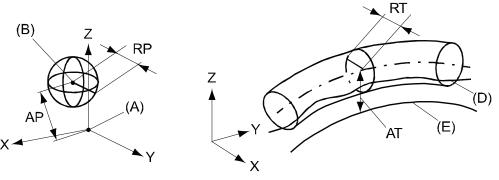

xx0800000424

i

Pos	Description	Pos	Description
Α	Programmed position	E	Programmed path
В	Mean position at program execution	D	Actual path at program execution
AP	Mean distance from pro- grammed position	AT	Max deviation from E to average path
RP	Tolerance of position B at re- peated positioning	RT	Tolerance of the path at repeated program execution

Description	IRB 660-180/3.15	IRB 660-250/3.15
Undirectional pose accuracy, AP <sup>i</sup> (mm)	0.20	0.20
Unidirectional pose repeatability, RP (mm)	0.05	0.05
Linear path repeatability, RT (mm)	0.23	0.17
Linear path accuracy, AT (mm)	2.20	2.13
Pose stabilization time PST (s)	0.17	0.22

AP according to the ISO test above, is the difference between the teached position (position manually modified in the cell) and the average position obtained during program execution. The above values are the range of average test results from a number of robots.

1.7.3 Velocity

## 1.7.3 Velocity

#### Maximum axis speeds

Axis No.	IRB 660-180/3.15	IRB 660-250/3.15
1	130°/s	95°/s
2	130°/s	95°/s
3	130°/s	95°/s
6	300°/s	240°/s

There is a supervision function to prevent overheating in applications with intensive and frequent movements.

1.7.4 Robot stopping distances and times

## 1.7.4 Robot stopping distances and times

#### Introduction

The stopping distances and times for category 0 and category 1 stops, as required by EN ISO 10218-1 Annex B, are listed in *Product specification - Robot stopping distances according to ISO 10218-1 (3HAC048645-001)*.

## **1.8 Customer connections**

## 1.8.1 Introduction

### General

Depending on the choice of options above the DressPack will have different content. The choice of routing will not affect the content. See tables for signal content below. For further information on the customer connection, see *Application interface connection type on page 56*.

#### DressPack, Parallel, bus and air communication

Туре	Application	Specification	Connection type	Harting Art- icle No.	Comment
Power (CP)	Utility power	4x0.75mm <sup>2</sup> (5A/250VAC)	3-module Hart- ing, shell size 10B, EE	Female, EE, 8 pin9 140 083 101	1x0.75 mm <sup>2</sup> protective earth
Signals (CS)	Parallel com- munication	16x AWG24 + 10x AWG24 (50V/1A)	3-module Hart- ing, shell size 10B, HD+EE	Female, HD, 25 pin9 140 253 101	4 quad twis- ted, 5 screened pair twisted
Signals (CS)		5x2AWG24 (50V/1A)	3-module Hart- ing, shell size 10B, HD	Female, HD, 25 pin9 140 253 101	Sep. Screened
Bus Commu- nication (BUS)	Profibus	2xAWG26, Z=150 Ohm (1MHz)		12 pin9 140	
	CANBus	2xAWG26, Z=120 Ohm (1MHz)			
	BUS power & BUS utility	2x2 AWG24			
Air (AIR)	Utility air	2x12.7 (1/2") P Nom = 16 bar	Parker Push- lock,1/2" M22x1,5 Brass 24 degree seal		

#### DressPack, Parallel and Ethernet communication

Туре	Application	Specification	Connection type	Supplier Art- icle No.	Comment
Functional Earth (FE)		10mm <sup>2</sup>	M8 Cable lug		
Bus com- munication (BUS)	Ethernet/IP, PROFINET	4x0.4mm <sup>2</sup>	M12 PFT Slim Design, 4- poles, D-coded	Male,Harting 21038821425	Ethernet CAT5e 100 Mbit <sup>1</sup> .
Power (CP)	Utility power	4x0.75mm <sup>2</sup> (5A/250VAC)	3-module Hart- ing, shell size 10B, EE	Female, EE, 8 pin9 140 083 101	1x0.75mm <sup>2</sup> protective earth

<sup>1</sup> Ethernet with wire colors according to PROFINET standard

Continues on next page

1.8.1 Introduction *Continued* 

Туре	Application	Specification	Connection type	Supplier Art- icle No.	Comment
Signals (CS)	Parallel com- munication	16x AWG24 + 10x AWG24 (50V/1A)	3-module Hart- ing, shell size 10B, HD+EE	Female, HD, 25 pin9 140 253 101	4 quad twis- ted, 5 screened pair twisted
Air (AIR)	Utility air	2x12.7 (1/2") P <sub>Nom</sub> = 16 bar	Parker Push- lock,1/2" M22x1,5 Brass 24 degree seal		

1.9.1 Introduction

## 1.9 Maintenance and troubleshooting

## 1.9.1 Introduction

General	
	The robot requires only minimum maintenance during operation. It has been designed to make it as easy to service as possible:
	Maintenance-free AC motors are used
	Oil is used for the gear boxes
	<ul> <li>The cabling is routed for longevity, and in the unlikely event of a failure, its modular design makes it easy to change</li> </ul>
Maintenance	
	The maintenance intervals depend on the use of the robot, the required maintenance activities also depends on selected options. For detailed information on maintenance procedures, see <i>Product manual - IRB 660</i> , chapter <i>Maintenance</i> .

This page is intentionally left blank

2.1 Introduction to variants and options

## 2 Specification of variants and options

## 2.1 Introduction to variants and options

#### General

The different variants and options for the IRB 660 are described in the following sections. The same option numbers are used here as in the specification form. The variants and options related to the robot controller are described in the product specification for the controller.

## 2 Specification of variants and options

#### 2.2 Manipulator

### 2.2 Manipulator

#### Variants

Option	IRB Type	Handling capacity (kg)	Reach (m)
435-58	660	180	3.15
435-59	660	250	3.15

#### Manipulator color

Option	Description	Note
209-1	ABB Orange standard	
209-2	ABB White standard	
209-202	ABB Graphite White standard	Standard color
209-3192	The robot is painted in chosen RAL - color	



Notice that delivery time for painted spare parts will increase for none standard colors.

#### Equipment

Option	Туре	Description
213-1	Safety lamp	A safety lamp with an orange fixed light can be mounted on the manipulator. The lamp is active in MOTORS ON mode. The safety lamp is required on a UL/UR approved robot.
159-1	Fork lift device	Lifting device on the manipulator for fork-lift handling.
37-1	Base plate	Can also be used for IRB 7600. See dimension drawing in <i>Mounting the manipulator on page 23</i> .

#### Resolver connection, axis 7

Option	Description	Note
864-1	On base	Used together with first additional drive, option 907-1.

#### **Electronic Position Switches (EPS)**

The mechanical position switches indicating the position of the three main axes are replaced with electronic position switches for up to 7 axes, for increased flexibility and robustness. For more detailed information, see *Product specification - Controller IRC5 with FlexPendant*.

#### Work range limit Axis 1

To increase the safety of the robot, the working range of axis 1 can be restricted by extra mechanical stops.

Option	Туре	Description
29-2	Axis 1, 7.5 degrees	Two stops which allow the working range to be restricted in increments of $7.5^{\circ}$ .

#### Extended work range

Option	Туре	Description
561-1	Extended work range axis 1	To extend the working range on Axis1 from ±180° to ±220°.
		When the option is used the mechanical stop shall be removed.
		Requires options SafeMove or EPS (Electronic Position Switches).

#### 

The option *Extended work range* enables an extension of the working range for axis 1, through a software configuration. With this option installed, the working range can exceed the range limited by the mechanical stop on axis 1. The working range shall be limited through the option SafeMove.

A risk analysis must be done to ensure that no risks remain when using option *Extended work range*, to limit the working range, and before removing the mechanical stops.

For information about the option SafeMove, see *Application manual - Functional* safety and SafeMove.

If the mechanical stop is removed, then the manipulator should have a marking for this, for example, a label. If the robot is delivered with the option *Extended work range*, then such a label is included on delivery.

#### Warranty

For the selected period of time, ABB will provide spare parts and labour to repair or replace the non-conforming portion of the equipment without additional charges. During that period, it is required to have a yearly Preventative Maintenance according to ABB manuals to be performed by ABB. If due to customer restrains no data can be analyzed in the ABB Ability service *Condition Monitoring & Diagnostics* for robots with OmniCore controllers, and ABB has to travel to site, travel expenses are not covered. The Extended Warranty period always starts on the day of warranty expiration. Warranty Conditions apply as defined in the Terms & Conditions.



This description above is not applicable for option Stock warranty [438-8]

## 2.2 Manipulator *Continued*

Option	Туре	Description
438-1	Standard warranty	Standard warranty is 12 months from <i>Customer Delivery Date</i> or latest 18 months after <i>Factory Shipment Date</i> , whichever occurs first. Warranty terms and conditions apply.
438-2	Standard warranty + 12 months	Standard warranty extended with 12 months from end date of the standard warranty. Warranty terms and conditions apply. Contact Customer Service in case of other requirements.
438-4	Standard warranty + 18 months	Standard warranty extended with 18 months from end date of the standard warranty. Warranty terms and con- ditions apply. Contact Customer Service in case of other requirements.
438-5	Standard warranty + 24 months	Standard warranty extended with 24 months from end date of the standard warranty. Warranty terms and conditions apply. Contact Customer Service in case of other requirements.
438-6	Standard warranty + 6 months	Standard warranty extended with 6 months from end date of the standard warranty. Warranty terms and conditions apply.
438-7	Standard warranty + 30 months	Standard warranty extended with 30 months from end date of the standard warranty. Warranty terms and conditions apply.
438-8	Stock warranty	Maximum 6 months postponed start of standard war- ranty, starting from factory shipment date. Note that no claims will be accepted for warranties that occurred be- fore the end of stock warranty. Standard warranty com- mences automatically after 6 months from <i>Factory</i> <i>Shipment Date</i> or from activation date of standard war- ranty in WebConfig.
		Note
		Special conditions are applicable, see <i>Robotics Warranty Directives</i> .

2.3 Floor cables

## 2.3 Floor cables

#### General

Additional floor cables for customer connections see Process on page 56.

## Manipulator cable length

Option	Lengths	
210-2	7 m	
210-3	15 m	
210-4	22 m	
210-5	30 m	

## 2 Specification of variants and options

#### 2.4 Process

## 2.4 Process

#### Application interface connection type

Option	Description	
16-1	Cabinet <sup>i</sup>	The signals are connected to 12-pole screw terminals, Phoenix MSTB 2.5/12-ST-5.08, to the control module.
i In a Mu	i In a MultiMove application, additional robots have no control module. The screw terminal with	

In a MultiMove application, additional robots have no control module. The screw terminal with internal cabling are then delivered separately to be mounted in the main robot control module or in another encapsulation, for example a PLC cabinet.

#### Communication

Option	Туре	Description
455-6	Parallel, Bus and Air Communication	Includes Customer Signals (CS), Cus- tomer Power (CP), Bus signals and two hoses for Air (inner diameter 12.5 mm)
455-8	Parallel and Ethernet communication	Includes CP, customer signals and PROFINET or Ethernet/IP for process cable package and two hoses for Air (inner diameter 12.5 mm)

#### Parallel/CAN/DeviceNet/Profibus/Ethernet

# The following information specifies the cable length for Parallel/CAN/DeviceNet/Profibus/Ethernet for connection to cabinet.

Option	Lengths
90-2/92-2/859-1/94-1	7 m
90-3/92-3/859-2/94-2	15 m
90-4/859-3	22 m
90-5/92-5/859-4/94-4	30 m

#### **Empty cabinet**

Option	Туре	Description
768-1	Empty cabinet small	See Product specification - Controller IRC5 with FlexPendant
715-1	Installation kit	See Product specification - Controller IRC5 with FlexPendant

#### Connector kits upper arm

C	Option	Туре	Description
4	31-1		Connector for customer Power/Signals/ and bus at axis 6 tool side.

2.5 User documentation

## 2.5 User documentation

#### User documentation

The user documentation describes the robot in detail, including service and safety instructions.



All documents can be found via myABB Business Portal, www.abb.com/myABB.

This page is intentionally left blank

3.1 Introduction to accessories

## **3** Accessories

## 3.1 Introduction to accessories

General	There is a range of tools and equipment available.
Basic software	and software options for robot and PC
	For more information, see <i>Product specification - Controller IRC5</i> and <i>Application manual - Controller software IRC5</i> .
Robot periphe	rals

• Motor Units<sup>2</sup>

<sup>2</sup> Not applicable for IRC5 Compact controller.

This page is intentionally left blank

## Index

Α

accessories, 59

B bus cables, 56

### С

cable lengths, 55 calibration standard type, 28 Calibration Pendulum, 30 CAN, 56 category 0 stop, 46 category 1 stop, 46 communication signals, 56 connections application interface, 56

## D

DeviceNet, 56 documentation, 57

### E

Electronic Position Switches, 52 EPS, 52 extended working range, 53 extra load, 37

#### F

fine calibration, 30

#### I

instructions, 57 ISO 9283, 44

## L

load diagrams, 33

#### М

maintenance, 49 manuals, 57 maximum load, 35 moment of intertia, 35

## 0

option Extended working range, 53 options, 51

#### Ρ

product standards, 19 Profibus, 56

#### S

safety standards, 19 service instructions, 57 standards, 19 ANSI, 19 CAN, 19 EN IEC, 19 EN ISO, 19 standard warranty, 53 stock warranty, 53 stopping distances, 46 stopping times, 46

## U

user documentation, 57

V variants, 51–52

#### W warranty, 53





WA 22 Beneficial Way Wangara WA 6065 📞 (08) 6314 1111 Support@automation-control.com.au

ABN 87 619 578 595

ABN 61 645 267 116

🔀 cs@automation-control.com.au

NSW